



2K Dual Cameras

Quick Start Guide - EN



Model: HGWIP-222

iGET HOMEGUARD 2024

✉ www.iget.eu/cs/helpdesk-centrum-cs
📄 <https://helpdesk.intelek.cz>

CE FC    Made in China



Multi-dimensional security
covers 360° of your home



Welcome


What's included



Dual Cameras



Quick Start Guide




Power Adapter



Type-C USB Cable



Warning Sticker



Bracket



Fixings



Wall Plug

Parts & Description



Step 1 Power on Camera



1 Connect the AC adapter to your camera and plug it in.

2 If you see the blue and red lights flashing, camera waiting to connect.

LED status

LED indicator shows operational status with colors. Refer to table below for detailed meaning of the LED indicator.

Indicator Light Status	Device Status
Red lights is solid on	Power up and activating
Blue and Red lights are blinking alternately	The device is ready to connect
Blue light is blinking quickly	The device is receiving the Wi-Fi signal or connecting to the Wi-Fi
Blue light is solid on	The device is connected to the network
Red light is blinking quickly	The device is restore to factory default
Blue light goes off	The device failed to connect to the network




3 Make sure you are within range of the same Wi-Fi network you'll use for your camera.

Step 2 Get the App

For the best experience, download the Homeguardlive app for your smartphone by scanning the QR code below or searching for "Homeguardlive" in the app store.





Step 3 Account Register

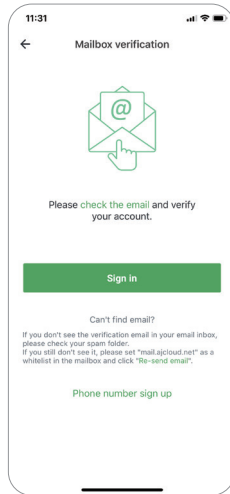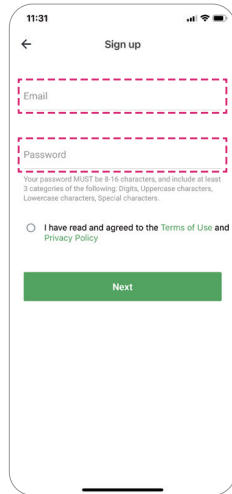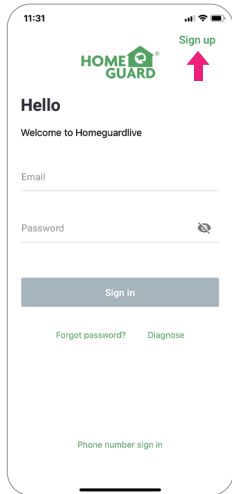

- 1 Open Homeguardlive App, then select Sign up.
- 2 Enter your email. Create a password at least 8 characters long. Your password must include three of the following:
 - At least one uppercase letter
 - At least one lowercase letter
 - At least one number
- 3 You will receive an email with your Activation Link. Open the link to activate your account. Go back to login your account after activation successful.



Step 4 Add device

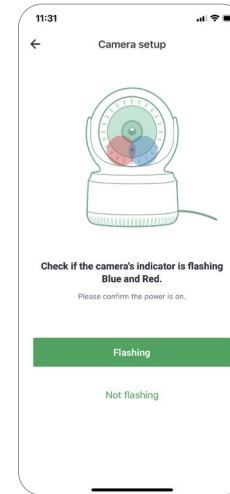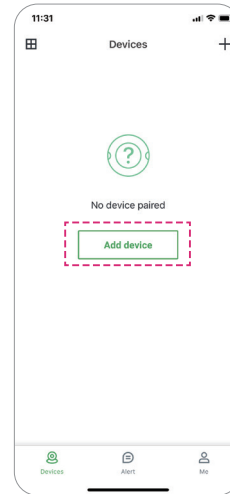

- 1 Login your account and tap "Add device".
- 2 Choose the "Indoor Camera" to connect.
- 3 Check if the camera's indicator is flashing Blue and Red. If not, Please try to reset the camera.
Reset Method: Keep the camera powered on for more than 1 minute, then press and hold "Reset" button until the LED turns red.




Step 5 Connect to Network

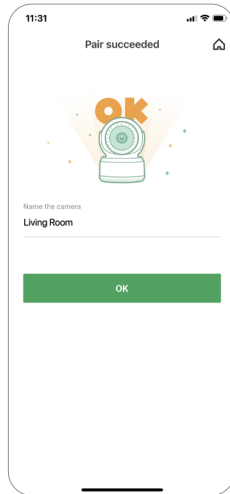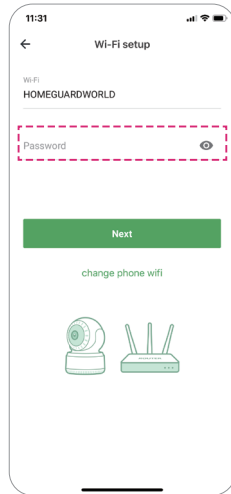

- 1 Enter the correct Wi-Fi password.
- 2 This App will generate a QR code, place the QR code 3~8 inches in front of the camera lens. When the camera prompt **“QR code scanning is successful”**, press **“Next”** and wait a moment.
- 3 Name the camera after the Pairing is successful. Press **“OK”** to complete the add operation.

Note: The camera can support both 2.4G & 5G Wi-Fi




You're Done!

Congratulations! Your HGWIP222 Dual Camera is set up and ready to go.


You are now free to position your camera anywhere in your home where you get a Wi-Fi signal and view it remotely from anywhere in the world on your Smartphone or Tablet!

Home Page

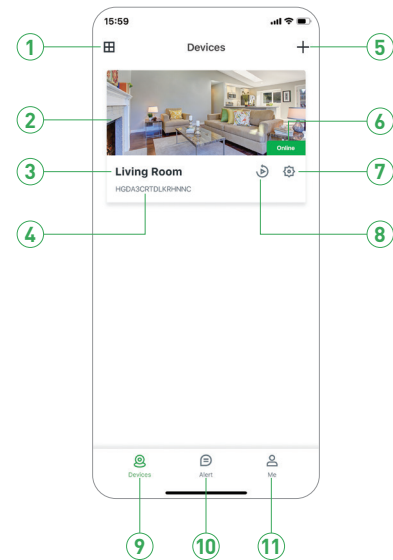

1	Split-screen	Tap to access Split-screen view
2	Live Video	Tap to start live view
3	Device name	Displays the camera name
4	Device ID	Displays the device cloud ID
5	Add Device	Tap to add a new camera
6	Device Status	Displays the camera network status
7	Setting	Tap to access camera setting
8	Replay	Tap to play the recorded video in the memory card
9	Devices	Tap to access device list page
10	Alerts	Tap to access alert information page
11	Me	Tap to access account information page

Live View

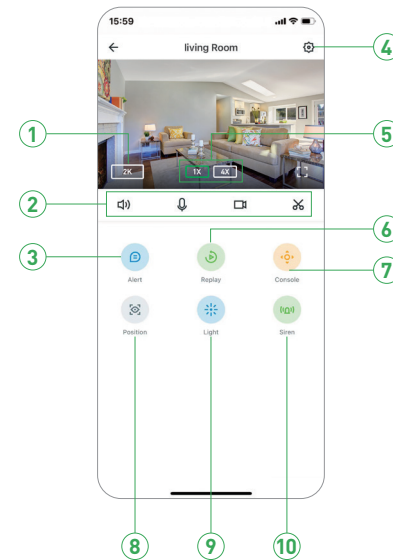

1	Resolution	Tap to change between video quality levels: 1080P & 2K
2	Mute / Unmute	Tap to hear the camera or unmute
	2-way Talk	Activate the microphone to enable 2-way talk
	Record	Saves video clip from a live video
	Capture	Saves images captured from a live video
3	Alert	Tap to access alert list
4	Setting	Tap to access camera setting
5	Zoom	Zoom in to see more details
6	Replay	Tap to play the recorded video in the memory card
7	Console	Tap to enable pan & tilt controls
8	Position	Adds / Adjusts the preset and sets the home position
9	Spotlight	Tap to open the spotlight
10	Siren	Tap to open the siren

View from Mac or Windows PC

Install "Homeguardlive" software for your Mac or Window PC from the App store or Microsoft store



Specifications

Item	Description
Dual Cameras	2K Wide-Angle, Lens 105° Field of View, f/2.0 Aperture 2K Telephoto Lens, 16× Hybrid Zoom, f/2.0 Aperture
Hardware Features	Dual-Band Wi-Fi 6, 2.4G & 5G One Touch Call Power Interface Reset Button Built-in microSD Socket Built-in Microphone & speaker
Resolution	4MP Video
Compression / Max Frame Rate	H.264 / H.265
Image Sensor / Lens	1/3" CMOS Sensor, f=4.0mm, F=2.0
Pan / Tilt Range	Horizontal 360°, Vertical 70°
AI Object Detection	Human / Vehicle / Pet
Spotlight	Up to 33ft/10m Color Night Vision
Wireless Speed	IEEE802.11b/g/n 150Mbps
Camera Dimensions	84mm × 76mm × 116mm
Temperature & Humidity	-10°C~40°C, 10%-90%
Power Input	DC 5V/1.5A, <7.5W