



1080P Mini Wi-Fi Smart Camera

Quick Start Guide - EN



Model: HGWIP-816

iGET HOMEGUARD 2022

✉ www.iget.eu/cs/helpdesk-centrum-cs
📄 <https://helpdesk.intelek.cz>



What's in the box



Camera



Power Adapter



USB cable



Adhesive tape



Bracket



Temperature & humidity sensor



Quick Start Guide



Screws

Parts & Function



Description


Item	Description
Power	DC 5V ± 10%
Status light	Red light solids on: the camera network is abnormal Blinking red light: awaiting WiFi connecting, or currently connecting (faster blinking) Blue light solids on: camera running correctly Blinking blue light: awaiting manual WiFi configuration, or currently connecting (faster blinking)
Microphone	Captures sounds for your video
SD card slot	Supports local SD Card storage (Max.128G)
Reset	Press and hold the 'RESET' for 5 seconds to reset the device (if you have modified settings, they will return to factory defaults) Pressing for 1 second will activate manual WiFi setup mode

Install

1 You can position the tail any way you like, it's your call!



2 Fix the camera on a clean surface with the bracket (the bracket can be fixed by screws or adhesive tape), then insert the camera into the stand from any angle.

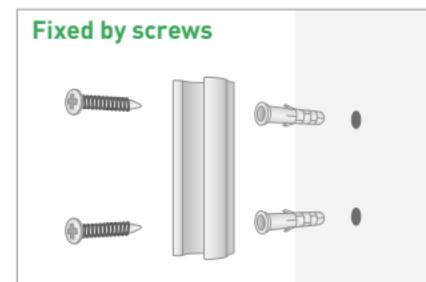

Step 1



Step 2


Step 1 Get the App

For the best experience, download the Homeguardone app for your smartphone by scanning the QR code below or searching for "Homeguardone" in the app store or Google play.



Step 2 Set up router

This product only supports 2.4GHz frequency band router, does not support 5GHz frequency band router, please set the relevant parameters of the router before WiFi configuration, WiFi passwords do not include special characters such as ~!@#\$%^&*(). When the device is configured in WiFi, the mobile phone and device are as close as to the router, which can speed up the configuration of the device.

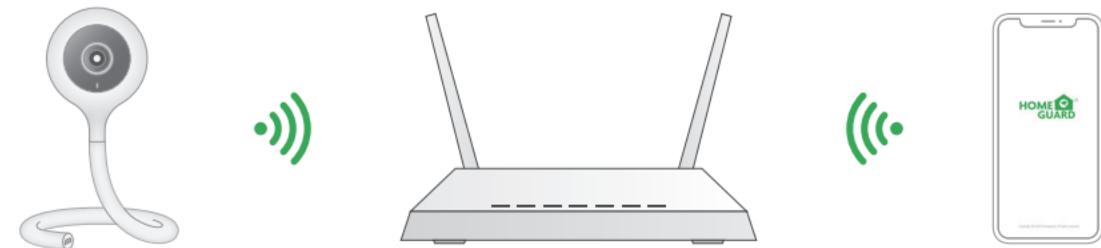


Notices before adding the device:


1. Please follow the instructions and make sure the password is inputed correctly.
2. One device can only be added with one App account, if the device has been added with another account already, then it can't be added to any another account again.

Step 3 Registration process

- 1 Open the Homeguardone App, click 'SIGN UP', input a valid email address and select 'registration means agreement with user agreement privacy agreement' then click 'NEXT'.

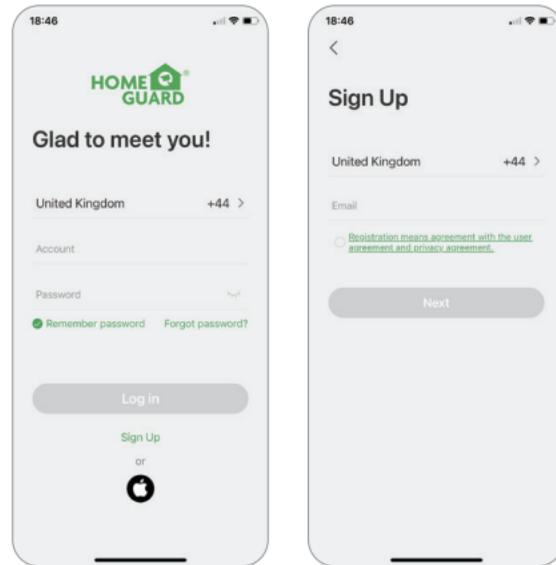


- 2 Create a nickname and login password, click "Done".
Note: Make sure your router, device, and mobile phone are nearby.

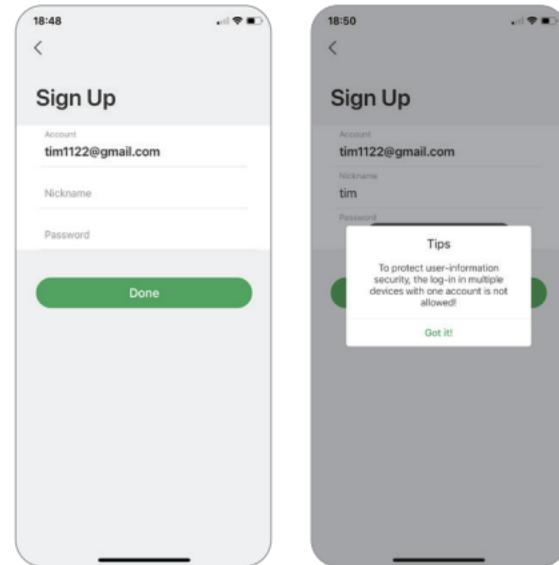


Step 4 QR Code Configuration


- 1 Open the Homeguardone App, click '+', and select the type of device to add.

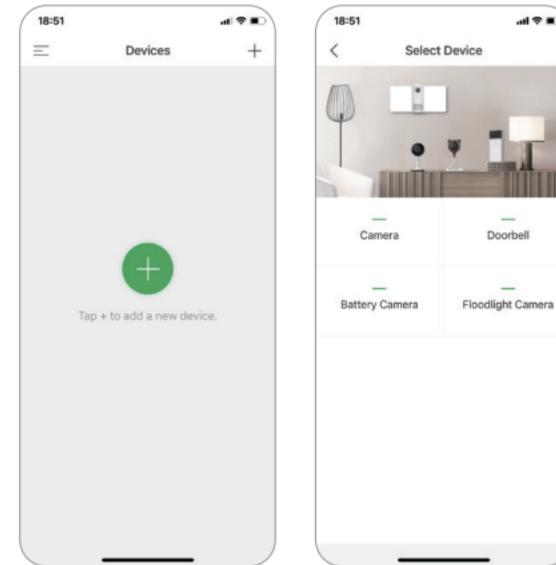


- 2 Please confirm the red LED light blinks, if not, please reset the device and wait for a flashing RED indicator light, click 'Next'. Then input the wireless password, click 'Next'.

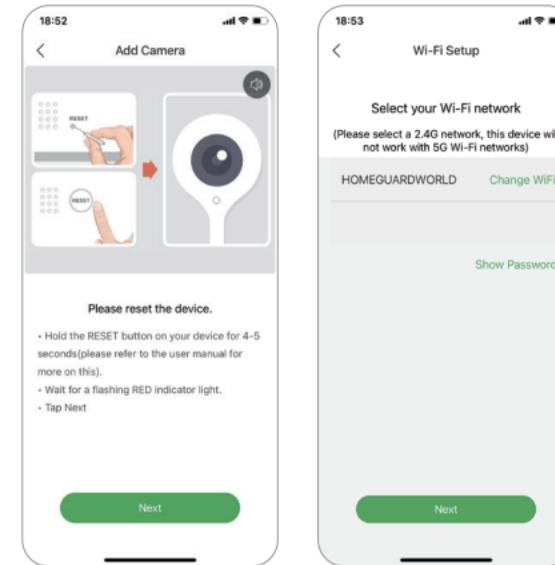

- 3 The device is scanning the QR code at a distance of 15~25cm, click 'Next' to view the scanning mode. After the device scans successfully, click 'Next', the App will automatically adds the scanned device.

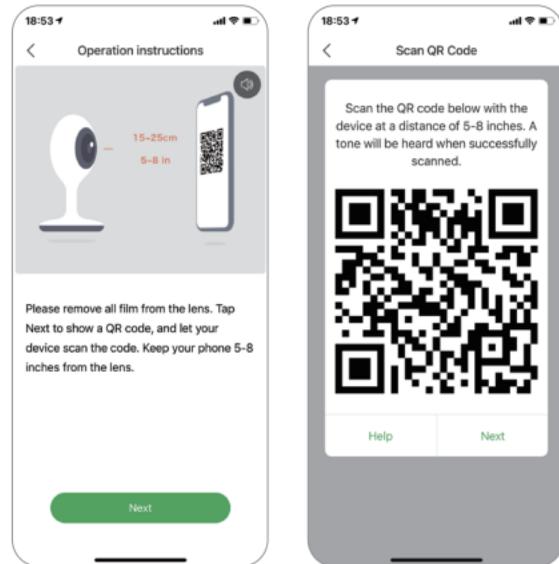


- 4 After the configuration is completed, name the camera and complete the guide of camera installation (Remind: long press the image to be previewed to remove the device, add device again to reset the device)

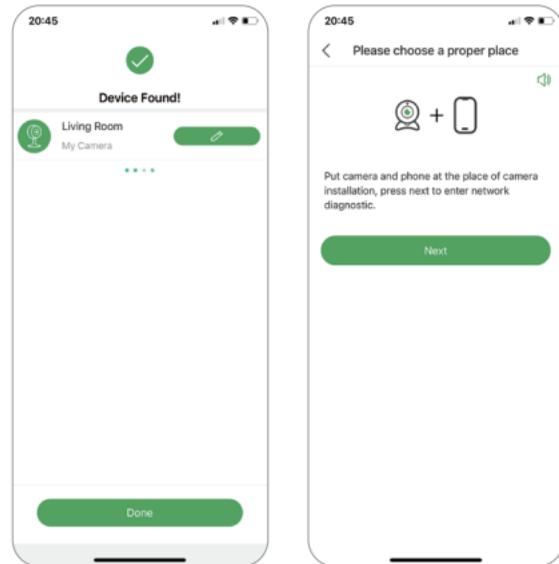


Temperature & humidity sensor


- 1 Connect temperature and humidity sensors and camera together. (The interface is connected via USB)

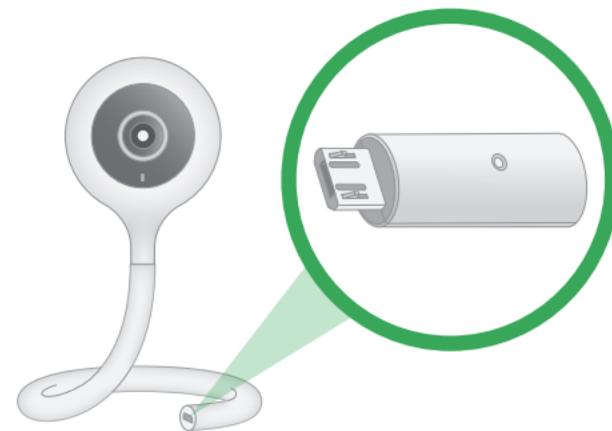

- 2 Start the device and read the temperature and humidity of the current environment on the App after adding.

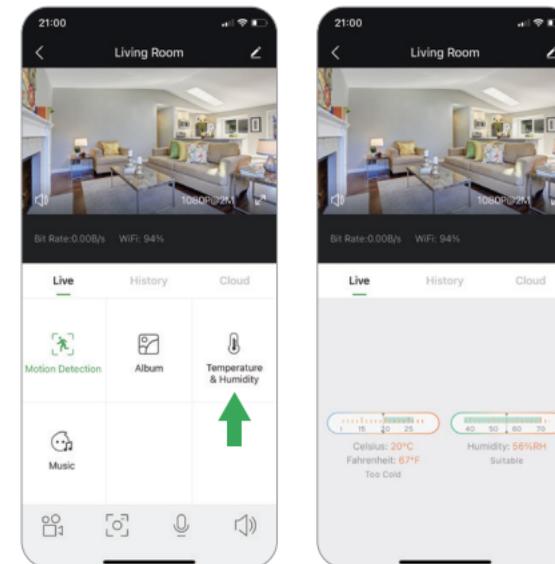

Home Page

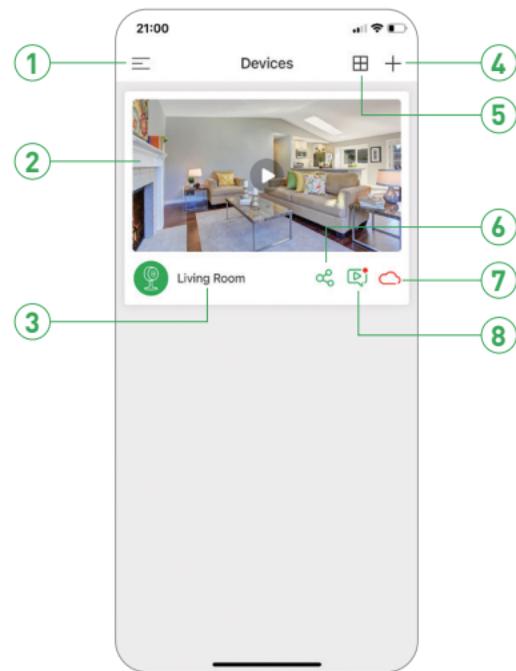

①	Main Menu	Tap to access main menu
②	Live Video	Tap to start live view
③	Device name	Displays the camera name
④	Add Device	Tap to add a new camera
⑤	Split-screen	Tap to access Split-screen view
⑥	Share Device	Tap to share the camera to others
⑦	Cloud	Tap to play the recorded video in the cloud
⑧	Replay	Tap to play the recorded video in the memory card

Live View



①	Setting	Tap to access camera setting
②	Mute / Unmute	Tap to hear the camera or unmute
③	Resolution	Tap to change video quality levels
④	Full screen	Click to view in full screen
⑤	Live view	Tap to the live view interface
⑥	History	Tap to play the recorded video in the memory card
⑦	Cloud	Tap to play the recorded video in the cloud
⑧	Motion Detection	Turn the motion detection on or off
⑨	Album	Browse videos or images recorded locally
⑩	Temperature & Humidity	Read the temperature & humidity of the current environment
⑪	Music	Enter the "MOVE MUSIC" page, select the music to be played
⑫	Record	Saves video clip from a live video
⑬	Capture	Saves images captured from a live video
⑭	2-way talk	Activate the microphone to enable 2-way talk
⑮	Mute / Unmute	Tap to hear the camera or unmute

FAQ

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset device only resets the network configuration of the camera, but cannot change the configuration on the App, remove the camera, and must be deleted by the App.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Specifications

Item	Description
Camera	1080p Full HD Video Recording, 105° Wide Angle Lens
Resolution	1920 × 1080
Video	H.264, 1920 × 1080@15fps
Audio	Built-in Microphone & Speaker, Support music play
Image Sensor	1/2.9" 2 Megapixel CMOS Sensor, f=3.6mm, F=2.2
Night Vision	Up to 33ft/10m
Motion Detection	Intelligent motion detection
Storage	Built-in microSD Socket (max 128 GB), Cloud Storage
Temperature & humidity	Support
Power Input	DC 5V/1A, <2.5W
Wireless	2.4G WIFI (IEEE802.11b/g/n)
Security Protocols	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Dimensions / Weight	53mm × 32mm × 280mm, 50g