

2.1 Start-up wizard



1 Create a Password

Please create a user name and password for your device. Password MUST be 8 characters long.




Use the on-screen keyboard to input text, numbers and characters. Click to change from lower-case to upper-case

5 IP Camera

This menu allows you to add IP cameras to the NVR.

2 Start Wizard

After NVR startup is completed, the start-up wizard will be displayed. Click "Start Wizard".

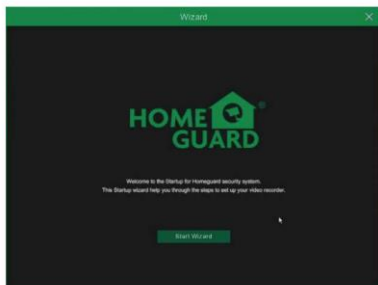

6 Disk

New hard drive(s) connected must be formatted before use. Upon connection, it will indicate to format new hard drive. Click on "Select" to select the unformatted hard drive. Click on "Format HDD" to pop up the user login window and enter the password to log in. A notice window will indicate "Entire Data Will Be Erased, do You Want To Continue?". Click "OK" to format the disk. When the progress bar is complete, the formatting process is completed.

3 Network

In DHCP mode the router will automatically assign an IP address to NVR.

If the NVR fails to obtain an IP address, refer to the NVR Router Guide. If the problem still cannot be resolved, contact technical support.

7 Resolution

Select the resolution for the VGA output or HDMI output of your monitor.

4 Date / Time

Set the date, time, NTP, DST.

8 Mobile

If you scan a QR code using Homeguardsafe, the device ID displayed in the NVR will be automatically reflected in the Mobile Viewer ID, and you can use the Mobile Viewer immediately by entering the ID / password of the NVR.

9 Summary

Shows system and network status of NVR.

Click on "Finish" to finish setting of startup wizard.

You can click on "Don't show this window next time" if you do not wish to have the wizard setting to appear next time.

1.1 Introduction



Congratulations on purchasing the iGET HOMEGUARD camera set.

The complete EN/CZ/SK/HU manual for basic setup and installation is available for download on the website www.iget.eu with the current product or here via the QR code:


The entire manual contains 40 pages.



1.2 Package Contents



6K PoE NVR, 12 Megapixels Camera, 48V/1.5A Power Adapter, Mouse, HDD Fixing Screw, Ethernet Cable, Quick Start Guide, Warranty Card, Warning Sticker.

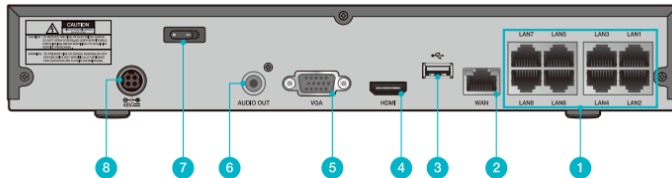

Items	Part Names	Functions
1	LAN Port	LAN network interface, support PoE, can supply power to the camera
2	WAN Port	Network input interface of the router
3	USB Port	For USB mouse and external storage
4	HDMI Output	For most modern TVs
5	VGA Output	Connect to VGA monitor, such as PC monitor
6	Audio Output	Audio signal output, RCA interface
7	Power Switch	Startup and shutdown
8	Power Port	Connect the attached power supply


1.4 HDD Installation (Optional)

The system may not include hard disk depending on the kit you selected. The NVR works with most 3.5" or 2.5" SATA HDD.

CAUTION: DO NOT install or remove the hard disk drive while the device power is turned ON.

- 1 When power supply is disconnected, remove the screws at both sides with screwdriver, then remove the screws on the rear board, and then remove top cover of NVR.


HDD Data & Power Ports



- 2 Connect data and power ports of hard drive to motherboard.



- 3 Holding the hard drive and the NVR, gently turn it over and line up the holes on the hard drive with the holes on the NVR. Using a screwdriver, screw the provided screws into the holes. Two groups of screw mounting holes are provided in the base frame of the NVR, respectively for installation of 3.5" hard drive and 2.5" hard drive. User should make selection based on their hard drive size. After complete HDD installation, assemble the cover.

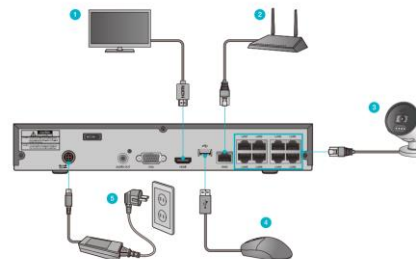

Warranty + Safety Instructions

a) Do not place any heavy or sharp objects on the device. b) Do not expose the device to direct sunlight or heat radiation, and neither should be covered. c) Do not expose the device to environments with higher or lower temperatures than recommended. d) Do not expose the device to dusty and humid environments over 85%, including rain and liquids (except for outdoor cameras). e) Do not use any corrosive cleaning agents to clean the device. f) Do not expose the device to strong magnetic or electronic interference. g) Do not use power adapters other than those included with the specific device. The supplied power supply may only be connected to an electrical network whose voltage matches the data on the power supply's nameplate. h) Do not leave the power adapter in places with a low combustion temperature or on parts of the human body, as the adapter heats up and can cause injury. i) Do not use the device while consuming food or drinks. j) Keep the device out of the reach of children. k) The user is not authorized to dismantle the device or replace any of its components. Opening or removing covers that are not originally accessible poses a risk of electric shock. Incorrect reassembly of the device and its subsequent reconnection also exposes you to the risk of electric shock. In case necessary service intervention is required, contact only qualified service technicians. l) If the device has been in an environment with a temperature lower than -10°C for a certain period, leave the unpowered device in a room with a temperature of 10°C to +40°C for more than one hour. Only then can you turn it on. m) Claim warranty repairs for the device with your dealer. In case of technical problems and questions, contact your dealer. n) For households: The given symbol (crossed-out wheeled bin) on the product or in accompanying documentation means that used electrical and electronic products should not be disposed of with household waste. To ensure proper disposal of the product, hand it over to a designated collection point, where it will be accepted free of charge. The correct disposal of this product will help save valuable natural resources and prevent any potential negative impacts on the environment and human health, which could otherwise be caused by inappropriate waste handling. For more details, please contact your local authorities or the nearest collection facility. The improper disposal of this type of waste can be penalized in accordance with national regulations. Information for users regarding the disposal of electrical and electronic devices (corporate and business use): For proper disposal of electrical and electronic devices, ask for detailed information from your dealer or distributor. Information for users regarding the disposal of electrical and electronic devices in other countries outside the European Union: The above-mentioned symbol (crossed-out wheeled bin) is valid only in the countries of the European Union. For proper disposal of electrical and electronic devices, ask for detailed information from your authorities or equipment dealer. Everything is expressed by the symbol of the crossed-out wheeled bin on the product, packaging, or printed materials.

Not intended for use near water, e.g., near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool (except for outdoor cameras).

Further Precautions: Follow the rules for working with electrical devices and plug the power supply cord only into corresponding electrical outlets. The user is not authorized to dismantle the device or replace any of its components. Opening or removing covers that are not originally intended for this purpose poses a risk of electric shock. Incorrect reassembly of the device and its subsequent reconnection also exposes you to the risk of electric shock.

Declaration of Conformity: INTELEK hereby declares that the HGNVK88604 device type is in compliance with Directive 2014/53/EU. The full text of the EU Declaration of Conformity is available on this website: www.iget.eu. The warranty period for the product is 24 months, unless stated otherwise.

RoHS: This device complies with the requirements for the restriction of the use of certain hazardous substances in electrical and electronic equipment (Government Decree No. 481/2012 Coll., as amended by Government Decree No. 391/2016 Coll.) and therefore with the requirements of Directive 2011/65/EU of the European Parliament and of the Council on the restriction of the use of certain hazardous substances in electrical and electronic equipment. The RoHS declaration can be downloaded at www.iget.eu.

Exclusive manufacturer/importer of iGET (Homeguard) products for the EU: INTELEK LTD, Dimophontos 1, Lamda Tower, 1075 Nicosia, CY, HE 438609 INTELEK LTD, branch office Ericha Roulčky 1291/4, Brno, 627 00, CZ WEB: <http://www.iget.eu> SUPPORT: helpdesk@iget.eu Copyright © 2026 Intelek LTD. All rights reserved.

