




SECURITY M3P11



EN Installation manual | **Wireless Outdoor Siren**

CZ Instalační manuál | **Venkovní siréna**

SK Inštaláčny manuál | **Vonkajšia siréna**

Website : www.iget.eu E-mail : sales@iget.eu

Features


The M3P11 wireless outdoor siren is an accessory of iGET SECURITY M3 series smart alarm system. It will sound with the strobe light flashing to deter crime when working.

It's easy to setup, reliable and safe, with core microprocessor and anti-tamper function.

Parameters

• Working Voltage	DC 12V
• Battery	7.2V 600mAh rechargeable Ni-MH battery
• Working Current	<300mA
• Standby Current	20-50mA
• Battery Standby Time	≤20 Hours
• Maximum Siren Volume	120dB
• Transmission Distance	Without obstacle 100m
• Transmission Frequency	433.29MHz
• Working Temperature	-20°C~50°C
• Humidity	≤90%rh (non-condensing)
• Weight	551.2g (battery included)
• Dimension	263mm*195mm*61mm (L*W*H)

Appearance

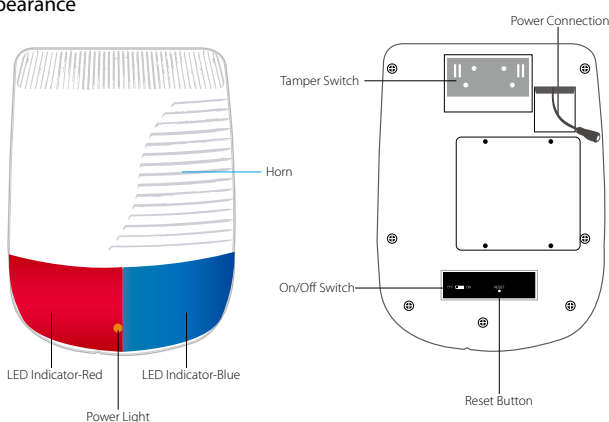

Pairing with main panel

- ① Scan the QR code printed on the siren and follow the guideline in App to continue.
- ② It is successfully paired when the siren beeps twice, and an informing SMS received indicating.

Function Clarification

- Daily status clarification
After successfully paired into main panel, the status of wireless outdoor siren changes with main panel.

Main panel status	LED Indicator Status	Horn Status	Interval Time of Sound	Sound Frequency
Disarm	Power light on	Beep 3 times	150ms	1kHz
Arm	Red light flashing	Beep 2 times	150ms	1kHz
Home Arm	Blue light flashing	/	/	/
SOS	Red/Blue light flashing alternately	SOS sound	/	/

- Anti-tamper function
The siren will immediately alarm when someone tries to remove illegally.

Accessories

- 1x power supply: 1x 5.5mm DC Output: 12V=1A
- 4x screws;
- 4x plastic screw bolt.

Exclusive importer of products iGET for EU:
INTELEK spol. s r.o., Vlárská 22, 627 00 Brno
SUPPORT: <http://www.iget.eu/helpdesk>
Copyright © 2015 INTELEK spol. s r.o. All rights reserved.



